





Sandvik offers a wide variety of rules including Dieflex, Dieflex-Ultra, Dieflex Hard, Vertex as well as a variety of creasing and specialty rules. Sandvik rules are precision manufactured to ensure long life and consistent performance in both flat and rotary diecutting operations.

Ultra™ Cutting Rule

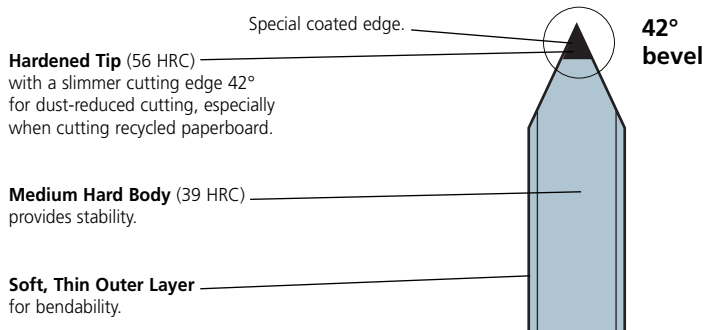

- Special edge coating for smoothness, less friction.
- Medium hard body and thin, soft outer skin.
- Hardened tip (Super hard).
- 42° edge, not the normal 52°.
- Uniform straightness.
- Uniform height and width.

Dieflex-42™ Cutting Rule

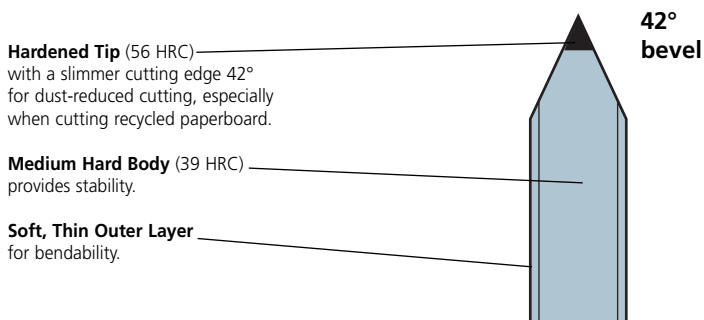

- Medium hard body and thin, soft outer skin.
- Hardened tip (Super hard).
- 42° edge, not the normal 52°.
- Uniform straightness
- Uniform height and width.



2041 Elm Court • Ontario, CA 91761
Toll-Free:
 (800) 423-4478 • Fax: (866) 786-2437




2532 Converse Street • Dallas, TX 75207
Toll-Free:
 (800) 262-4695 • Fax: (800) 446-6651



960 Industrial Drive • Elmhurst, IL 60126
Toll-Free:
 (800) 334-7914 • Fax: (800) 554-9124




Dieflex Hard™ Cutting Rule

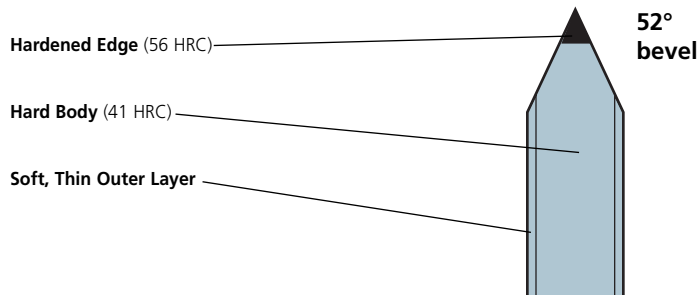


- Hard body and thin, soft outer skin.
- A shaved edge, 52° standard bevel.
- Super hard cutting edge.
- Good bendability.
- Uniform straightness
- Uniform height and width.
- Available also in 42° bevel.

Dieflex™ Cutting Rule

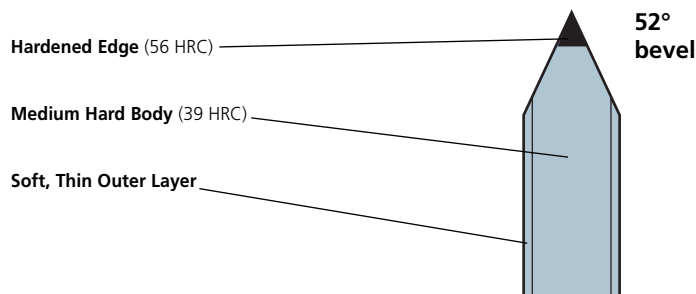


- Hard body and thin, soft outer skin.
- A shaved edge, 52° standard bevel.
- Super hard cutting edge.
- Excellent bendability.
- Uniform straightness
- Uniform height and width.
- Available also in 42° bevel.

XD-700™ Cutting Rule

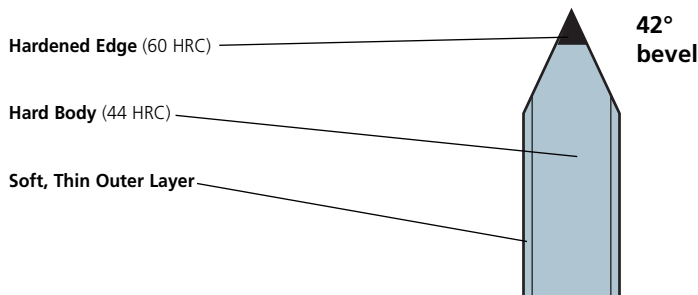

- Hard body and thin, soft outer skin.
- Super hard cutting edge.
- 42° shaved edge.
- Special edge support system.
- Excellent for gasket cutting.

Vertex™ Cutting Rule

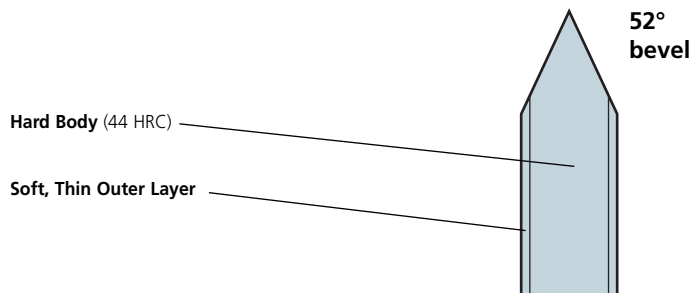

- Hard body and thin, soft outer skin.
- A shaved edge.
- Super hard cutting edge.
- Excellent formability.
- Uniform straightness.



2041 Elm Court • Ontario, CA 91761
 Toll-Free:
 (800) 423-4478 • Fax: (866) 786-2437




2532 Converse Street • Dallas, TX 75207
 Toll-Free:
 (800) 262-4695 • Fax: (800) 446-6651



960 Industrial Drive • Elmhurst, IL 60126
 Toll-Free:
 (800) 334-7914 • Fax: (800) 554-9124




"G-R" Precision Ground Cutting Rule

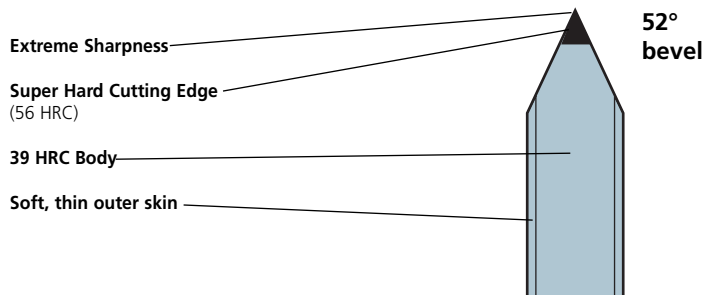


- Height accuracy $\pm .0004$.
- Superior sharpness.
- Hardened edge (56 HRC)
- Consistent, reliable bendability.
- Available also in 42° bevel.

Sandvik 400 Utility Cutting Rule

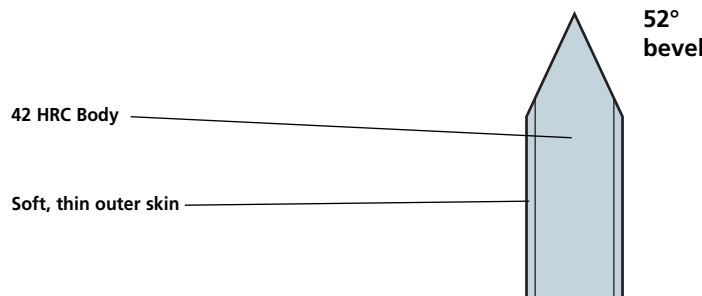

- Designed to meet the needs of the corrugated industry.
- Excellent bendability.
- Shaved edge.
- Superior dimensional accuracy.
- Economically priced.

"G-12" Precision Ground Cutting Edge Cutting Rule

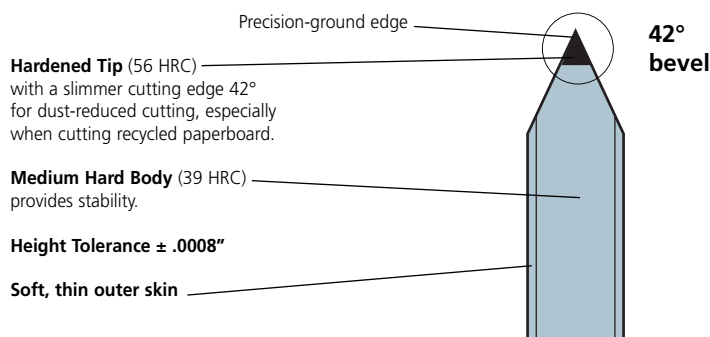

- Special edge coating for smoothness, less friction.
- Medium hard body and thin, soft outer skin.
- Hardened tip (Super hard).
- Uniform straightness
- Uniform height and width.

Creasing Rules



Reversible - Has identical, fully round shaved edges, top and bottom. Cannot be put into dies upside down. Goes into the dieboard quickly without damaging kerf. Height controlled to half standard tolerance so it will not crush the board or break the counter plate.

Uniform Straightness - Width controlled to $\pm .0005$ " to fit snugly.

Shaved Edge - Uniform creasing from the precision-shaved edges.

Made to exacting standards - Provides the straightness that the laser die industry demands: uniformly flat, with a height, width and edge that is accurate from piece to piece, box to box.



2041 Elm Court • Ontario, CA 91761
Toll-Free:
(800) 423-4478 • Fax: (866) 786-2437



2532 Converse Street • Dallas, TX 75207
Toll-Free:
(800) 262-4695 • Fax: (800) 446-6651



960 Industrial Drive • Elmhurst, IL 60126
Toll-Free:
(800) 334-7914 • Fax: (800) 554-9124